(51) International Patent Classification [6] : H04N 7/26, 7/36	A1	(11) International Publication Number: **WO 99/29113** (43) International Publication Date: 10 June 1999 (10.06.99)

(21) International Application Number: PCT/GB98/03553

(22) International Filing Date: 27 November 1998 (27.11.98)

(30) Priority Data:
97309575.5 27 November 1997 (27.11.97) EP

(71) Applicant *(for all designated States except US)*: BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: NILSSON, Michael, Erling [GB/GB]; 5 Laburnum Gardens, Rushmere St. Andrew, Ipswich, Suffolk IP5 1BY (GB). GHANBARI, Mohammed [GB/GB]; 14 Crome Close, Colchester, Essex CO3 4QQ (GB).

(74) Agent: LLOYD, Barry, George, William; BT Group Legal Services, Intellectual Property Dept., Holborn Centre, 8th floor, 120 Holborn, London EC1N 2TE (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published
With international search report.

(54) Title: TRANSCODING

(57) Abstract

A transcoder has a decoder fo decoding a received video signal which has been coded according to a first coding scheme employing motion compensation and carries coded data and motion compensation information, and an encoder for encoding the output of the decoder according to a second coding scheme also employing motion compensation. The transcoder generates estimated motion vectors for a current frame of the video signal, using vectors which, in the received signal, accompany at least one other frame of the video signal. These may be used directly by the encoder or used to define a search area for motion estimation.

TRANSCODING

This invention relates to a method and apparatus for transcoding video signals from a first format into a second format.

5   Many techniques for compression of video signals are known. Broadcast quality television requires in excess of 100 Mbit/s when transmitted in digital form, which is expensive to transmit and requires links of high bandwidth. Known compression coding techniques may be used which take advantage of the high degree of spatial and/or temporal redundancy in the video signals being encoded.

10   So, for example, in videoconferencing applications, compression down to a bit rate of a few hundred kilobits per second is possible whereas videotelephone quality pictures including sound can be compressed down to only 64 kilobits per second, equivalent to a single telephone channel.

One known compression technique is predictive coding which exploits the

15   assumption that a picture element (pixel) within a frame is related to neighbouring pixels in the same frame (spatial prediction) or a different frame (temporal prediction) and that the value of a pixel may therefore be predicted at a receiver instead of full information about the pixel being transmitted. It is only necessary to transmit the prediction error arising from such an assumption. For instance the

20   first pixel of a frame may be transmitted exactly with each subsequent pixel being transmitted as the difference between it and its predecessor.

To reduce further the amount of information needed to be transmitted, a technique known as motion compensation may be used in which a picture is divided into blocks of pixels and each block of a current frame is compared with a

25   corresponding block of a reference frame, which may be a previous or a subsequent frame, and with shifted positions of that block, and the region of the reference frame which the block most closely resembles is identified. The vector difference in position between the identified region and the block in question is termed a motion vector and is used to shift the identified region of the reference

30   frame into the position of the relevant block in the current frame. Motion vectors are generated for most or all the blocks of a current frame and are used to derive a predicted frame from the reference frame(s). The differences between the current and predicted frame are, on average, smaller than those between the current and reference frame and can be encoded using less data. A decoder which already has

2

the reference frames stored can thus reproduce the current frame using the motion vectors and the difference values. A signal may be coded using any of the aforementioned coding techniques either separately or in combination.

5   There are circumstances when it is desirable to employ a transcoder which receives a signal encoded according to a first coding scheme and outputs an encoded data stream encoded according to a second scheme. If one has a decoder which operates according to the second coding scheme then such a transcoder would allow the decoding of a signal encoded according to the first coding scheme without modifying the original encoder or the ultimate decoder

10   Known transcoders generally decode a signal encoded according to a first coding scheme into an uncompressed signal which is then encoded by an encoder according to the second coding scheme to output a new data stream. Thus a full decoding operation is carried out to reconstitute the original video signal and then this video signal is encoded to provide a new coded data stream according to the

15 second coding scheme. For coding methods involving motion compensation new motion vectors are generated for the signal encoded according to the second coding scheme and this accounts for a large proportion of the processing time of - conventional transcoders. Transcoders are generally assumed not to exist in a transmission path i.e. a video signal encoded according to the H.261 standard is

20 assumed to be received by a decoder conforming to the H.261 standard: the introduction of a transcoder into the transmission path will introduce delay into the path which delay may be unacceptable.

International patent application WO95/29561 describes a transcoder which receives a signal encoded according to a first coding scheme employing

25 motion compensation and outputs a signal encoded according to a second coding scheme which also employs motion compensation, the motion vectors being extracted from the received video signal and transferred to the output signal. Thus, it is not necessary to recalculate the motion vectors for the second coding scheme. However this shceme presupposes that the received signal contains

30 motion vectors suitable for use in the second coding scheme.

According to the present invention there is provided a transcoder comprising a decoder for decoding a received video signal coded according to a first coding scheme, and an encoder for reencoding the signal according to a second coding scheme, said coding schemes being such that at least some frames

are coded using motion-compensated inter-frame predictive coding based on a reference frame which is not the same in the second coding scheme as it is in the first coding scheme, wherein that the transcoder includes motion vector processing means to generate an estimated motion vector for a current frame of the video signal, the

5   motion vector processing means being connected to receive, when processing vectors for a current frame, vectors which, in the received signal, accompany at least one other frame of the video signal.

In another aspect, the invention provides a transcoder comprising a decoder for decoding a received video signal , said received signal being coded

10   according to a first coding scheme employing motion compensation and comprising coded data and motion compensation information, and an encoder for encoding the output of the decoder according to a second coding scheme employing motion compensation, the encoder including motion estimation means for generating motion compensation information, wherein the motion estimation means is

15   arranged to receive motion compensation information obtained from the received signal and to carry out motion estimation within a search area centred on the received motion compensation information, wherein, for use where at least some frames are coded using motion-compensated inter-frame predictive coding based on a reference frame which is not the same in the second coding scheme as it is in the first

20   coding scheme, the transcoder includes motion vector processing means to generate an estimated motion vector for a current frame of the video signal, the motion vector processing means being connected to receive, when processing vectors for a current frame, vectors which, in the received signal, accompany at least one other frame of the video signal, and the motion estimation means being connected to receive the said

25   estimate.

In a further aspect, the invention provides a method of transcoding a received video signal coded according to a first coding scheme into a signal according to a second coding scheme, said coding schemes being such that at least some frames are coded using motion-compensated inter-frame predictive coding

30   based on a reference frame which is not the same in the second coding scheme as it is in the first coding scheme, characterised by processing received motion vectors to generate an estimated motion vector for a current frame of the video signal, the processing step being responsive, when processing vectors for a current frame,

4

vectors which, in the received signal, accompany at least one other frame of the video signal.

In yet another aspect of the invention there is provided a method of transcoding a signal representing a two-dimensional array, the method comprising
5   decoding a received signal encoded according to a first coding scheme employing motion compensation, said signal comprising coded data and motion compensation information, and encoding the decoded output according to a second coding scheme employing motion compensation, the encoding including generating motion compensation information by carrying out motion estimation within a search area
10   centred on motion compensation information obtained from the received signal, wherein, for use where at least some frames are coded using motion-compensated inter-frame predictive coding based on a reference frame which is not the same in the second coding scheme as it is in the first coding scheme, the method includes the step of motion vector processing to generate an estimated motion vector for a current frame
15   of the video signal, the processing step being responsive, when processing vectors for a current frame, vectors which, in the received signal, accompany at least one other frame of the video signal, and the motion estimation serving to perform estimation within a search area centred on a position determined by the said estimate.

Other, preferred, aspects of the invention are set out in the sub-claims.
20   The invention will now be described further by way of example with reference to the accompanying drawings, in which:

Figure 1 shows a known transcoder;

Figure 2 shows the capture, coding and display order for video signals conforming to MPEG and H.261 coding standards;
25   Figure 3 shows a second embodiment of a transcoder according to the invention;

Figure 4 shows a portion of a frame store and illustrates the motion vector generation.

A transcoder is used to convert signals encoded according to a first format
30   into signals encoded according to a second format. Figure 1 shows a known form of transcoder which is arranged to convert video signals coded at a particular bit rate (e.g. 64k bit/s) conforming to the H.261 standard to video signals coded at a lower rate (e.g. 32k bit/s) conforming to the H.261 standard.   Clearly the

5

transcoder may, in practice, be arranged to convert signals from and to other formats.

The decoder part of the transcoder shown in Figure 1 comprises a de-multiplexer 1 which receives an incoming coded data stream conforming to the
5   H.261 standard and de-multiplexes the data stream into its constituent parts of compressed video data and motion vectors. The compressed video data is then decoded by a variable length decoder (VLD) 2, and then passes to an inverse quantiser 4 which outputs values of the discrete cosine transform (DCT) coefficients. The DCT coefficients are then transformed back into the pixel domain
10 by an inverse discrete cosine transform (IDCT) unit 6 to produce a video signal in the pixel domain. This signal is then added by an adder 10 to the previous frame (if any) stored in a frame store 8 and the resulting predicted frame is stored in the. frame store 8. Upon receipt of the first frame, the uncompressed frame is stored in a frame store 8 – i.e. the second input to the adder 10 is zero. For subsequent
15 frames, the decoded data represent a prediction error and are added to the contents of the frame store 8 by the adder 10. However, the frame store output is motion-compensated by a motion compensator 11 controlled by motion vectors from the demultiplexer 1.

The frame output by the decoder part is then output to a subtractor
20 12 of the encoder part, which also receives as an input the output of a frame store 14 of the encoder part, which stores a decoded version of the previous encoded frame of the encoding loop. Before the contents of the frame store 14 are input to the subtractor 12, motion compensation is carried out by a motion compensation unit 15 on the contents of the frame store 14, under control of a
25 motion estimator 24 which, for each block of a frame to be encoded, searches the frame store 14 in the vicinity of the block position to identify a region which best resembles the block: the vector offset between the block position and the region identified forms a motion vector for controlling the motion compensation unit 15.

The output of the subtractor 12 is converted to discrete cosine transform
30 coefficients by a discrete cosine transform (DCT) unit 16, quantised by a quantiser 18 and variable-length coded by a coder 26 for transmission. The motion vectors calculated by the motion estimator 24 are multiplexed into the data stream by a multiplexer 27. A buffer 28 buffers the encoded data stream output by the multiplexer 27, to provide an output at the bit rate required by the transmission

6

medium. This output may have a constant bit rate or a variable one. To generate the contents of the frame store 14, the output of the quantiser 18 is decoded by an inverse quantiser 20 and inverse DCT unit 22 and added to the motion-compensated contents of the frame store 14 by an adder 23.

5   One aspect of the transcoder which involves a significant amount of processing power is the operation of the motion estimator 24; thus motion vector estimation for an 8x8 block is typically carried out within a search area of ±8 or ±16 pixels in both directions around the block, involving, even for the ±8 case, some 289 calculations. Consequently, efforts have been made to simplify this by

10   making use in some way of the motion vectors already present in the incoming signal. Thus, our international patent application WO 95/29561 describes a transcoder like that of Figure 1 but proposes to eliminate the motion estimation unit 24 by feeding the incoming motion vectors to the motion compensation unit 15 and the multiplexer 27, either directly or - in the case where the pixel resolution

15   of the incoming and outgoing video signals differ - after scaling by an appropriate factor.

          Another approach has been suggested in US patent 5,600,646. There it is suggested that the incoming motion vector be used as a "seed" for the search; by starting the search at the displacement given by the corresponding vector from the

20   decoder, a much smaller search area is found to be sufficient. In the US patent, a search extent of ±3 pixels is suggested, though we have found that a search area of ±1 pixel gives useful results.

          The manner of inter-frame differential coding employed in the H.261 standard is straightforward in that each predictive coding process is based on the

25   *previous* frame as a reference. However not all known coding systems do so - the MPEG standard, described further below, is one example. The present invention aims to make use of the incoming motion vectors in a situation where the transcoder operates between two coding standards where at least some frames are coded using motion-compensated inter-frame predictive coding based on a

30   reference frame which is not the same in the one standard as it is in the other standard. The transcoder now to be described is designed for use in one such situation, viz. the conversion of an MPEG-coded signal to an H.261-coded signal.

          Firstly, the format of an MPEG signal will be explained. It should be noted that when in this description we use expressions such as "earlier", "later",

7

"preceding" or "next", this refers (unless explicitly stated otherwise) to the order of the frames in capture and display order (i.e. as would be output by a camera, or seen on a display monitor), irrespective of the actual order in which the frames are coded or transmitted. In MPEG, frames are coded in three distinct ways, resulting

5   in three different types of coded frame. An intra-frame, or I-frame, is not coded by reference to any other frame (i.e. it does not employ inter-frame differential coding at all). A predicted frame (P-frame) is coded by motion-compensated inter-frame differential coding relative to an earlier frame. This earlier frame must be either an I-frame or a P-frame and is, in general, not the immediately preceding frame. The

10   third type of frame is a bidirectional frame (B-frame). One or more B-frames may occur between an I-frame or P-frame and the next I-frame or P-frame; the actual number is not restricted by the standard but in practice there are always two. For the purposes of description, we will refer to a sequence of frames beginning and ending with an I-frame, but containing no intermediate I-frames, as a group of

15   pictures; and to a sequence beginning and ending with an I-frame or P-frame as a subgroup of pictures (this terminology is not necessarily the same as that used in the published standard). Note that using the terminology (except at the beginning and end of a transmission) an I-frame belongs to two groups of pictures and an I- or P-frame belongs to two subgroups of pictures. It follows that a group of

20   pictures contains one or more sub-groups of pictures. In practice there are four types of sub-group: IBBI, IBBP, PBBI and PBBP.

Each block within a B-frame is coded in one of four ways:

(a)   by motion-compensated inter-frame differential coding based on the the most recent past frame which is not itself a B-frame (a motion vector for forward

25   prediction may be transmitted);

(b)   by motion-compensated inter-frame differential coding based on the next future frame which is not itself a B-frame (a motion vector for backward prediction may be transmitted);

(c)   by interpolation: a prediction of the block for the purpose of differential

30   coding is formed by interpolation between the motion-compensated inter-frame prediction based on the most recent past frame which is not itself a B-frame and the motion-compensated inter-frame prediction based on the next future frame which is not itself a B-frame (a motion vector for forward prediction and a motion vector for backward prediction may be transmitted);

8

(d)   without inter-frame predictive coding (an "intra-block").

The coder decides which of (a), (b) and (c) to use according to which gives the best prediction and hence the most economical coding. Intra-blocks (d) are used if the coder finds that none of the other options gives a useful prediction.

5 These do not occur often in practice. Note also that this decision is made on a block-by-block basis, so that a given B-frame will more often than not involve the use of more than one of these four methods.

Because backward prediction is used for the B-frames, it is necessary to code (and decode) the frames within a subgroup in a different order from the

10 capture and display order, though the order of the subgroups in unaffected. Thus, for an IBBP subgroup the I-frame is coded first, followed by the P-frame, and then the B-frames. As this is the order of decoding, the frames are transmitted in this order (this is not actually necessary, but minimises delay).

Figure 2a shows ten frames of a video signal, in capture and display order,

15 numbered 0 to 9. Figure 2b shows these same frames referenced with a letter I, P or B to indicate the type of coding to be used, followed by the same number, and then by a subscript indicating the order in which the frames are processed by an MPEG coder or decoder. In this description the frames will be referred to as I0, B1 etc. and the subscripts added only where this assists understanding. This Figure

20 also shows the motion vectors diagrammatically by means of arrows, where the arrowhead points to the reference frame. Forward motion vectors are notated as $F_{i,j}$ where the first index indicates which frame the vector belongs to and the second index identifies the reference frame: thus $F_{4,3}$ is the vector for frame B4, relative to frame P3 as reference frame. Backward vectors are indicated by R -

25 e.g. $R_{4,6}$ is the vector for frame B4, relative to frame I6 as reference frame.

Figure 3 shows a transcoder according to one embodiment of of the invention arranged to receive signals encoded according to ISO/IEC standard 11172-2 (commonly known as MPEG1) and to output signals encoded according to H.261.

30   The transcoder has a similar structure to that of Figure 1, and components having substantially the same function are indicated using the same reference numerals. The decoder part is formed by items 1 to 11, plus a frame reordering unit 30 which receives the decoded frames in the order of receipt - i.e. the order shown in Figure 2c - and outputs them in display and capture order - i.e. as shown

in Figure 2a (it contains two frame stores and read-write circuitry to read and write the frames in the required order). This is a conventional MPEG decoder except that (for reasons which will be explained) the frames are delayed longer than would be usual: for this reason the reordering unit 30 is followed by a one-frame delay

5 35. The timing of the frames incoming to the transcoder ("IN") and output from the reordering unit ("OUT") is shown in the following Table:

IN	0	3	1	2	6	4	5	9	7	8	etc		
OUT				0	1	2	3	4	5	6	7	8	9

In other words the picture reordering unit 52 receives frames 0, 3, 1; outputs frame 0; stores the next decoded frame 2; outputs frame 1; stores the decoded frame 6; outputs frame 2; stores the decoded frame 4; and so on.

10 Clearly if more P and B frames occur between each I frame, the picture reordering unit 52 will need to be arranged to store more frames of data.

On the encoder side, items 12 to 28 form an H.261 encoder just like the one in Figure 1, except that the motion estimation unit 24 is replaced by a motion estimation unit 31.

15 Before proceeding with description of the remainder of Figure 3, we observe that the encoder is required to produce an H.261 signal, that is, for the sequence depicted in Figure 2a, a sequence as shown in Figure 2d, where each frame after the first is a predicted frame based on the immediately preceding frame as reference, and requires the generation of a motion vector relative to that

20 immediately preceding frame. Looking at the motion vectors provided by the MPEG signal, we see that:

$I0_0$ and $I6_4$ will contain no vectors as they are reference pictures.

$P9_7$ may only contain vectors relative to $I6_4$.

$B4_5$ and $B5_6$ may contain forward vectors from $P3_1$, and backward vectors

25 from $I6_4$.

$B7_8$ and $B8_9$ may contain forward vectors from $I6_4$, and backward vectors from $P9_7$.

When such a MPEG signal is transcoded to H.261, the set of forward and

30 backward vectors which may relate to non-consecutive pictures must be converted to a set of forward vectors that relate from one picture to the next. For this purpose, the embodiment as shown in Figure 3 includes a motion vector processor

32 for deriving forward motion vectors MV'_1 from the forward and backward motion vectors MV_i.

The one-frame delay mentioned earlier serves to ensure that, at the time the encoder comes to process any particular frame, all the vectors which might be
5 needed have in fact been received. The motion vector processor 32 is preceded by a buffer 33 which is sufficiently large to contain all the vectors for five consecutive frames of the incoming signal to ensure that, at the time the processor comes to estimate motion vectors for any particular frame, all the vectors which might be needed are still available.

10   The processor 32 is a program-controlled processing unit which serves to examine the contents of the buffer 33 and to extract from it, for each block of each frame, one or more vectors, and to perform, where necessary, arithmetic operations upon it or them so as to form at least one estimated motion vector for use in coding the frame under consideration according to the H.261 standard.

15 There are four types of vector derivation that may be used. The first of these is the forward vector. Since the objective is to obtain a forward vector which identifies for a frame j a region of the immediately preceding frame j-1 suitable for prediction, the obvious candidate, if available, is the single step forward vector VFS from the MPEG frame. If, on the other hand, the MPEG frame carries a
20 forward vector referencing a frame earlier by n frames (i.e. frame j-n), then this vector can be divided by n to give a vector usable for frame n or indeed for the intervening frame(s) j-1 ... j-n+1. This is notated here generically as VFN or, for specific values of n as VF2, VF3 etc.

A second type of derivation takes note of the fact that if the MPEG signal
25 contains a backward vector for a frame j-1 (or j-n) relative to frame j, then the negative of this (divided by n if need be) is a fair estimate VRS (or VRN) of the wanted vector.

Thirdly, one may take the difference between two forward vectors to obtain a forward difference vector VRD; and fourthly the negative of the difference
30 between two backward vectors (VRD).

A mixed vector VMX, for example, for frame $B7_8 = F9,6 + R7,9$, may also be useful but is not included in the present version.

Because none of the vectors shown in Figure 2b is actually guaranteed to occur in particular subgroup of pictures, one may also include the possibility of

using the vector derived for a nearby frame (notated as VFS(j-1) etc.). This means that the probability of no derived vector being available becomes very small: however, should this occur (and it will only occur if the block in question or the corresponding block in its (later) reference frame was coded as an intra-block) then

5   that block can be coded as an intra- block in the outgoing H.261 signal.

Most of these possibilities are set out in the Table below for blocks I6, B7, B8 and P9.

Frame	VFS/VFN	VRS/VRN	VFD	VRD
$I6_4$	1) VFS(j+1) =F7,6 4) VF2(j-1) = ½F5,3 6) VFS(j-2) =F4,3 9) VF3(j+3) = $^1/_3$F9,6	2) VRS(j-1) = -R5,6 7) VR2(j-2) = -½R4,6 8) VR2(j+1) = -½R7,9	3) VFD(j-1) = F5,3–F4,3	5) VRD(j-1) = - (R4,6-R5,6)
$B7_8$	1) VFS = F7,6 3) VF2(j+1) = ½F8,6 7) VF3(j+2) = $^1/_3$F9,6	2) VR2 = -½R7,9 4) VRS(j+1) = -R8,9 9) VRS(j-2) = -R5,6	5) VFD(j+1) = F8,6–F7,6 8) VFD(j+2) = F9,6–F8,6	6) VRD(j+1) = - (R7,9-R8,9)
$B8_9$	1) VF2 = ½F8,6 2) VFS(j-1) = F7,6 6) VF3(j+1) = $^1/_3$F9,6	7) VR2(j-1) = -½R7,9 3) VRS = -R8,9	4) VFD = F8,6-F7,6 8) VFD(j+1) = F9,6-F8,6	5) VRD = - (R7,9-R8,9)
$P9_7$	5) VF3 = $^1/_3$F9,6 6) VF2(j-1) = ½F8,6 7) VFS(j-2) = F7,6 8) VFS(j+1) =F10,9 11) VF3 (j+3) = $^1/_3$F12,9	1) VRS(j-1) = -R8,9 9) VR2(j-2) = -½R7,9 10) VR2(j+1) = -½R10,12	2) VFD = F9,6-F8,6 3) VFD(j-1) = F8,6-F7,6	4) VRD(j-1) = - (R7,9-R8,9)

By way of explaining some of these more fully:

For $B7_8$, the single forward vector VFS is simply its forward vector F7,6 from $I6_4$. Its scaled backward vector is minus one half of its backward vector R7,9 from $P9_7$. There is no forward difference vector and no backward difference

5   vector.

For $B8_9$, the scaled forward vector is half its forward vector F8,6 from $I6_4$. Its scaled backward vector is minus its backward vector from $P9_7$. The backward difference vector is the difference between its own backward vector and that of $B7_8$. Its forward difference is the difference between its own forward vector and

10   $B7_8$'s forward vector.

For $P9_7$, the scaled forward vector is one third of its forward vector from $I6_4$. Its forward difference is the difference between $P9_7$'s forward vector and $B8_9$'s forward vector. There is no scaled backward vector and no backward difference vector.

15   For $I6_4$, there are no vectors: vectors for this frame must be derived from vectors for nearby frames.

There are three possible modes of operation for this motion vector derivation (it being assumed that any given version of the apparatus uses one of these only).:

20   (i)   hierarchical;

(ii)   evaluation;

(iii)   a combination of the two.

In the hierarchical method, the processor 32 operates in accordance with a preferred order of the vector types. These depend on the frame type, and are

25   shown by the numbering in the table, so for I6, the hierarchy might be: VFS(j+1), VRS(j-1), VFD(j-1), VF2(j-1), VRD(j-1), VFS(j-2), VR2(j-2), VR2(J+1) and VF3(j+3).

Thus for I6, the processor reads VFS(j+1) from the buffer if it is available. If not, it reads VRS(j-1). If this is not available then it reads out the two vectors necessary to calculate VFD(j-1), and subtracts them to form the derived vector.

30   And so on.

In the evaluation method, the processor computes all the available candidate vectors for the current block and forwards them to the motion vector estimation unit 31 which then evaluates them by, for each vector, forming a predicted block using that vector (after a search as described below, if this option

is being used) and calculating a metric (such as the sum of absolute differences) between the predicted block and the block to be encoded. The vector to be chosen is the one giving the lowest metric.

The combined method is the same as the evaluation method, except that

5 the number of vectors to be evaluated is limited to the first few (perhaps three) available vectors, considered in the order prescribed by the list.

It is possible, though non-optimum, to use the vector obtained in this way directly: in fact, if one does so, using the hierarchical method the motion vector evaluation unit 31 becomes just a through-connection. We prefer, however, to use

10 the vector to establish an offset for the motion vector estimation unit 31 to perform a search around a small area around the position established by the vector. Thus the the motion vector estimation unit 31 carries out motion estimation in a search area, the location of which is determined by the received motion vectors.

15 This is illustrated in Figure 4, which shows a portion of the frame store 14, each square 20 representing a picture element (or pixel). Conventionally, motion vectors are determined for blocks of pixels rather than for each individual pixel; Figure 4 therefore shows a block 22 of 4 x 4 pixels. For a prior art transcoder, for instance as is described in WO95/29561, the motion vectors would

20 simply result in the prediction for the block currently under consideration being the region within the frame store determined by the received motion vector MV_1 for the block, before the subtractor 12 carried out its operation.

In a transcoder according to this version of the invention however, further motion estimation is carried out. The motion vector MV'_1 from the processor 32

25 initiates a search in the frame store 14 around a position offset from the current block under consideration by an amount represented by the motion vector associated with the current block.

For instance, suppose that the motion vector MV'_1 received for a current block (shown is solid lines in Figure 4) at the position A in a current picture

30 specifies a shift from the the position A to the position B shown in double lines. Further motion estimation is then carried out in a search area 26 around position B (indicated by dotted lines).

Conventionally, according to the H.261 or the MPEG standard, motion estimation is carried out for a search area of ± 8 or ± 16 pixels around the block.

14

Although a full motion estimation search may be carried out, it has been found that a severely limited search in the region $\pm$ 1 pixel (as shown by the search area 26) gives significantly improved results compared to the arrangement described in WO95/29561. Such a restricted search area means that the number of

5   calculations required to determine a motion vector for the second coding scheme is reduced (for a 8 x 8 block and a search area of $\pm$ 8 pixels) from 289 calculations to 9 calculations. The calculated motion vector MV_2 is then added to the motion vector MV'_1 to form a new motion vector MV_3 for the block. Once a new motion vector MV_3 is calculated the block of the frame store 14 centred on the new

10   motion vector MV_3 is output to the subtractor 12 and the motion vectors MV_3 are input to the multiplexer 27.

Although the transcoder described is designed to transcode MPEG signals into H.261 signals, the principle is applicable to other situations where at least some frames are coded using motion-compensated inter-frame predictive coding

15   based on a reference frame which is not the same in the one standard as it is in the other standard. For example the transcoder of Figure 3 could be configured for the reverse conversion. If the motion vectors for the H.261 frames shown in Figure 2d are denoted by F1,0, F2,1, F3,2 etc., then estimates F'i,j of the motion vectors required to construct an MPEG signal can be constructed as follows:

20   F'7,6 = F7,6

F'8,6 = F8,7 + F7,6

F'9,6 = F9,8 + F8,7 + F7,6

R'7,9 = -(F9,8 + F8,7)

R'8,9 = -F9,8.

25   In the event that one or more vectors is absent from the incoming signal, vector estimates for non-consecutive frame prediction might be generated by multiplying the incoming vectors, e.g.:

*F'8,6 = 2 * F8,7*

*F'8,6 = 2 * F7,6*

30   *F'9,6 = 3 * F9,8*

*F'9,6 = 3 * F8,7*

*F'9,6 = 3 * F7,6*

*R'7,9 = -2 * F9,8*

*R'7,9 = -2 * F8,7.*

CLAIMS

1.   A transcoder comprising a decoder for decoding a received video signal
5 coded according to a first coding scheme, and an encoder for reencoding the signal
according to a second coding scheme, said coding schemes being such that at
least some frames are coded using motion-compensated inter-frame predictive coding
based on a reference frame which is not the same in the second coding scheme as it
is in the first coding scheme, *characterised in that* the transcoder includes motion
10 vector processing means (32) to generate an estimated motion vector for a current
frame of the video signal, the motion vector processing means being connected to
receive, when processing vectors for a current frame, vectors which, in the received
signal, accompany at least one other frame of the video signal.

15 2.   A transcoder comprising a decoder for decoding a received video signal,
said received signal being coded according to a first coding scheme employing
motion compensation and comprising coded data and motion compensation
information, and an encoder for encoding the output of the decoder according to a
second coding scheme employing motion compensation, the encoder including
20 motion estimation means (31) for generating motion compensation information,
wherein the motion estimation means is arranged to receive motion compensation
information obtained from the received signal and to carry out motion estimation
within a search area centred on the received motion compensation information,
characterised in that, for use where at least some frames are coded using motion-
25 compensated inter-frame predictive coding based on a reference frame which is not
the same in the second coding scheme as it is in the first coding scheme, the
transcoder includes motion vector processing means (32) to generate an estimated
motion vector for a current frame of the video signal, the motion vector processing
means being connected to receive, when processing vectors for a current frame,
30 vectors which, in the received signal, accompany at least one other frame of the video
signal, and the motion estimation means (31) being connected to receive the said
estimate.

16

3.   A transcoder according to claim 2 wherein the signals represent a video image divided into blocks of picture elements, wherein the motion estimation means is arranged to carry out motion estimation on a block-by-block basis.

5   4.   A transcoder according to any one of the preceding claims, including a buffer (33) for buffering the received motion vectors and delay means (35) for delaying the video signals prior to reencoding.

5.   A transcoder according to any one of the preceding claims in which the
10 estimated motion vectors generated by the motion vector processing means include:
      at least one motion vector which is the reverse of the motion vector from a frame of the received signal other than the current frame.

6.   A transcoder according to any one of the preceding claims in which the
15 estimated motion vectors generated by the motion vector processing means include:
      at least one motion vector for previous-frame prediction which is a scaled version of the motion vector from a frame of the received signal which involved prediction from a non-consecutive earlier frame.

20 7.   A transcoder according to any one of the preceding claims in which the estimated motion vectors generated by the motion vector processing means include:
      at least one motion vector which is an arithmetic combination of motion vectors from a plurality of frames of the received signal.

25 8.   A transcoder according to any one of the preceding claims in which the motion vector processing means (32) is operable to generate one of more of a plurality of possible estimated motion vectors in accordance with a predetermined hierarchy.

30 9.   A transcoder according to any one of the preceding claims in which the motion vector processing means (32) is operable to generate a plurality of candidate estimated motion vectors and the or a motion estimation means (31) is operable to evaluate the candidate estimated motion vectors and to select one in accordance with a predetermined criterion.

10.   A transcoder according to claim 2 or any one of claims 3 to 9 when dependent on claim 2 wherein the motion estimation means (32) is arranged to carry out motion estimation within a search area of $(n\pm1)x(m\pm1)$picture elements

5   centred on the estimated motion vector.

11.   A transcoder according to any any one of the preceding claims wherein the two coding schemes employ different orders of transmission of the frames of the video signal and the transcoder further includes re-ordering means (30) for re-

10   ordering the received signal.

12.   A method of transcoding a received video signal coded according to a first coding scheme into a signal according to a second coding scheme, said coding schemes being such that at least some frames are coded using motion-compensated

15   inter-frame predictive coding based on a reference frame which is not the same in the second coding scheme as it is in the first coding scheme, *characterised by* processing received motion vectors to generate an estimated motion vector for a current frame of the video signal, the processing step being responsive, when processing vectors for a current frame, vectors which, in the received signal, accompany at least one other

20   frame of the video signal.

13.   A method of transcoding a received video signal representing a two-dimensional array, the method comprising decoding a received signal encoded according to a first coding scheme employing motion compensation, said signal

25   comprising coded data and motion compensation information, and encoding the decoded output according to a second coding scheme employing motion compensation, the encoding including generating motion compensation information by carrying out motion estimation within a search area centred on motion compensation information obtainwed from the received signal, *characterised in*

30   *that*, for use where at least some frames are coded using motion-compensated inter-frame predictive coding based on a reference frame which is not the same in the second coding scheme as it is in the first coding scheme, the method includes the step of motion vector processing to generate an estimated motion vector for a current frame

18

of the video signal, the processing step being responsive, when processing vectors for a current frame, vectors which, in the received signal, accompany at least one other frame of the video signal, and the motion estimation serving to perform estimation within a search area centred on a position determined by the said estimate.

5

14.   A method of transcoding according to claim 14 wherein the signals represent a video image divided into blocks of picture elements, and the motion estimation is carried out on a block-by-block basis.

10   15.   A method according to any one of claims 12 to 14, including buffering the received motion vectors and delaying the video signals prior to reencoding.

16.   A method according to any one of claims 12 to 15 in which the estimated motion vectors generated by the motion vector processing include:

15   at least one motion vector which is the reverse of the motion vector from a frame of the received signal other than the current frame.

17.   A method according to any one of claims 12 to 16 in which the estimated motion vectors generated by the motion vector processing include:

20   at least one motion vector for previous-frame prediction which is a scaled version of the motion vector from a frame of the received signal which involved prediction from a non-consecutive earlier frame.

18.   A method according to any one of claims 12 to 17 in which the estimated

25   motion vectors generated by the motion vector processing include:
at least one motion vector which is an arithmetic combination of motion vectors from a plurality of frames of the received signal.

19.   A method according to any one of claims 12 to 18 in which the motion

30   vector processing generates one of more of a plurality of possible estimated motion vectors in accordance with a predetermined hierarchy.

20.   A method according to any one of claims 12 to 19 in which the motion vector processing generates a plurality of candidate estimated motion vectors and

the method includes motion estimation to evaluate the candidate estimated motion vectors and to select one in accordance with a predetermined criterion.

21.   A method of transcoding according to claim 13 or any one of claims 14 to 5   20 when dependent on claim 13 wherein the motion estimation is carried out within a search area of $(n\pm1)x(m\pm1)$ picture elements centred on the estimated motion vector.

22.   A method according to any of claims 12 to 21 wherein the two coding 10   schemes employ different orders of transmission of the frames of the video signal and the method further includes re-ordering the decoded received signal.

Fig.1.
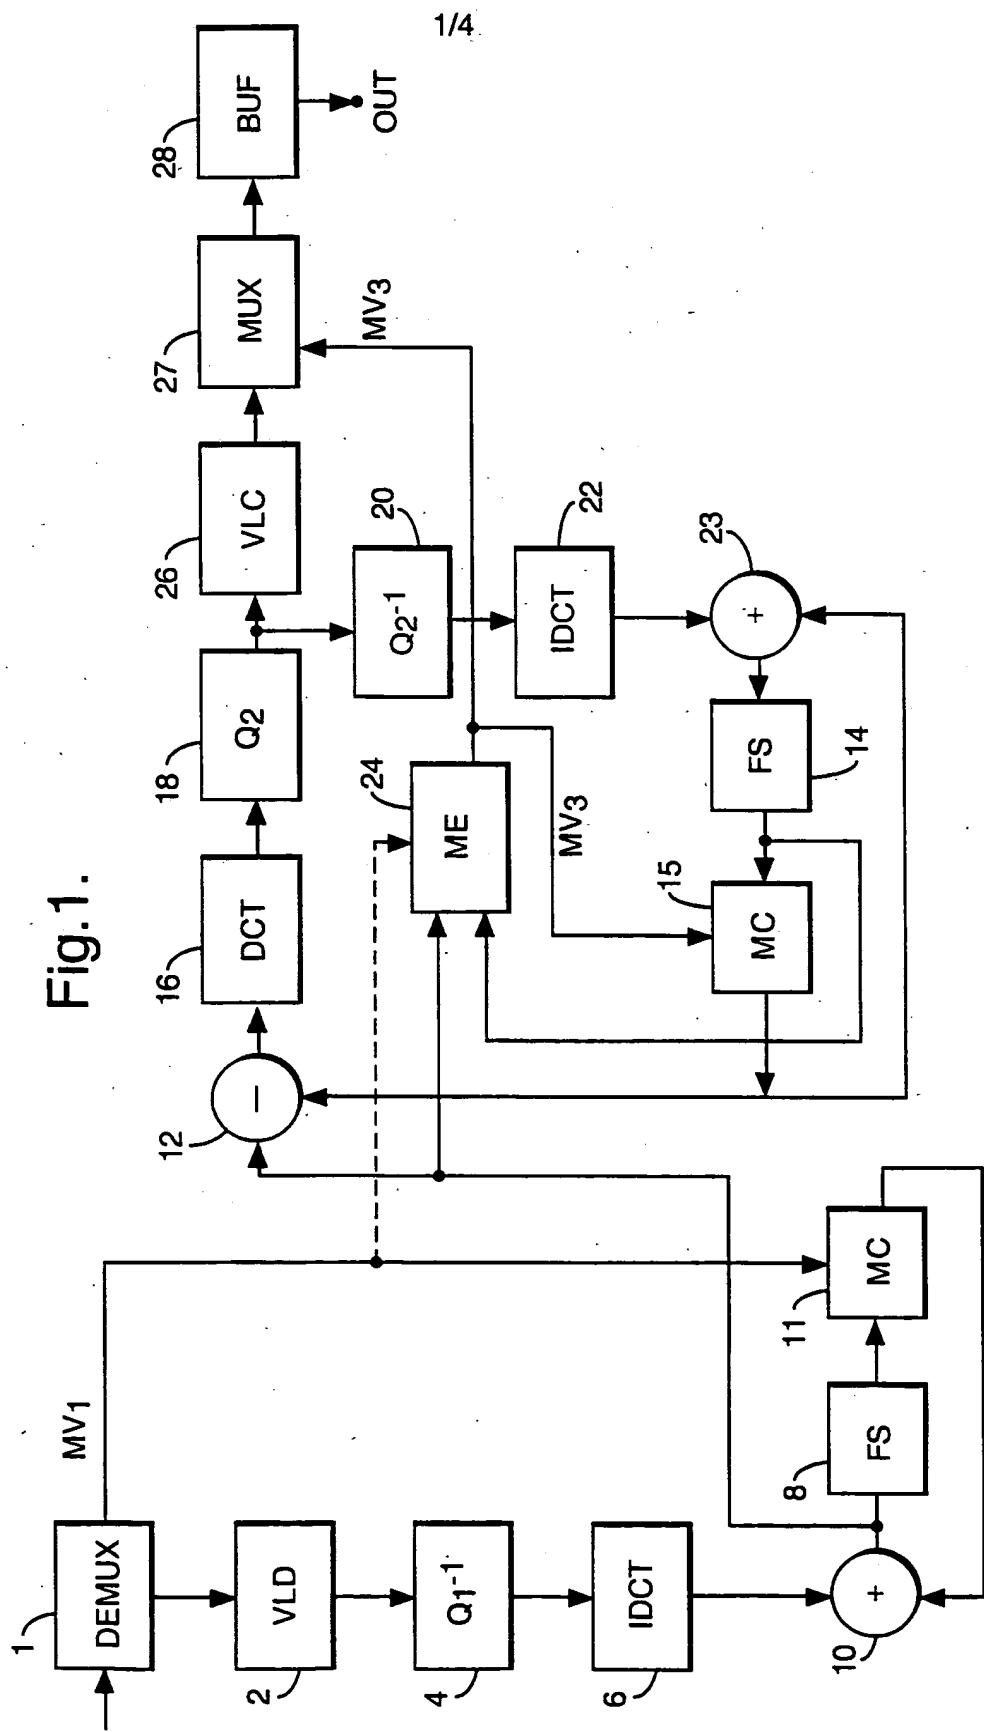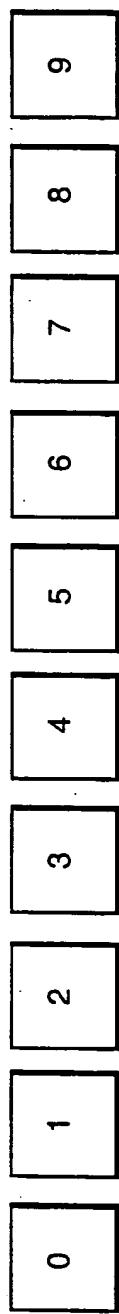
Fig.2a.
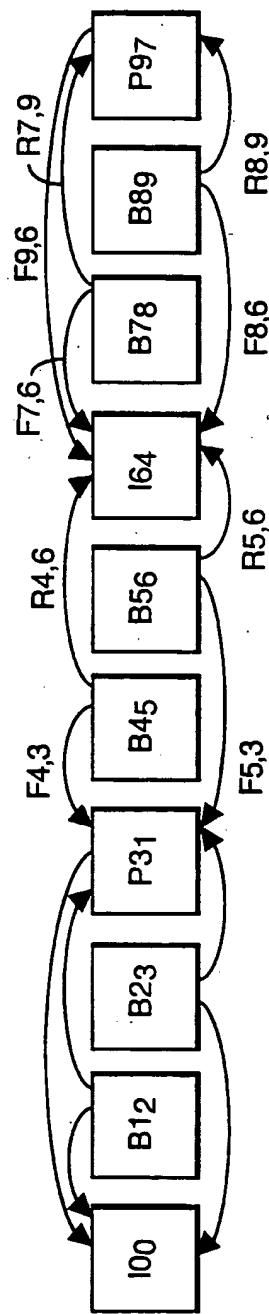
Fig.2b.

Fig.2c.

Fig.2d.

Fig.3.
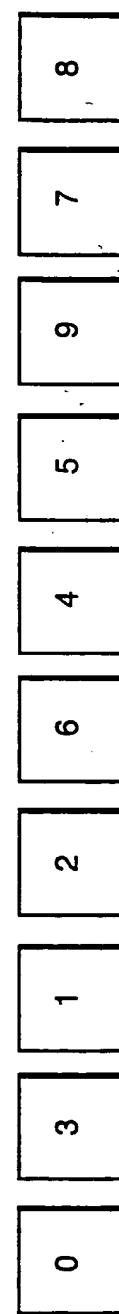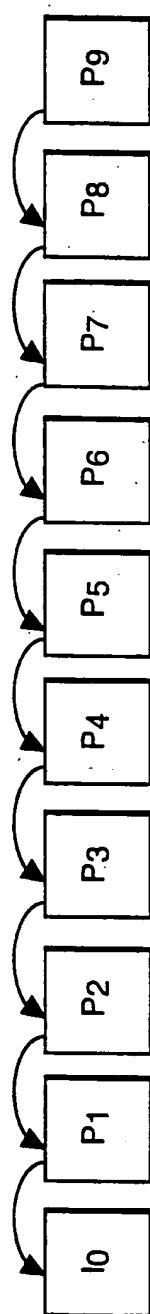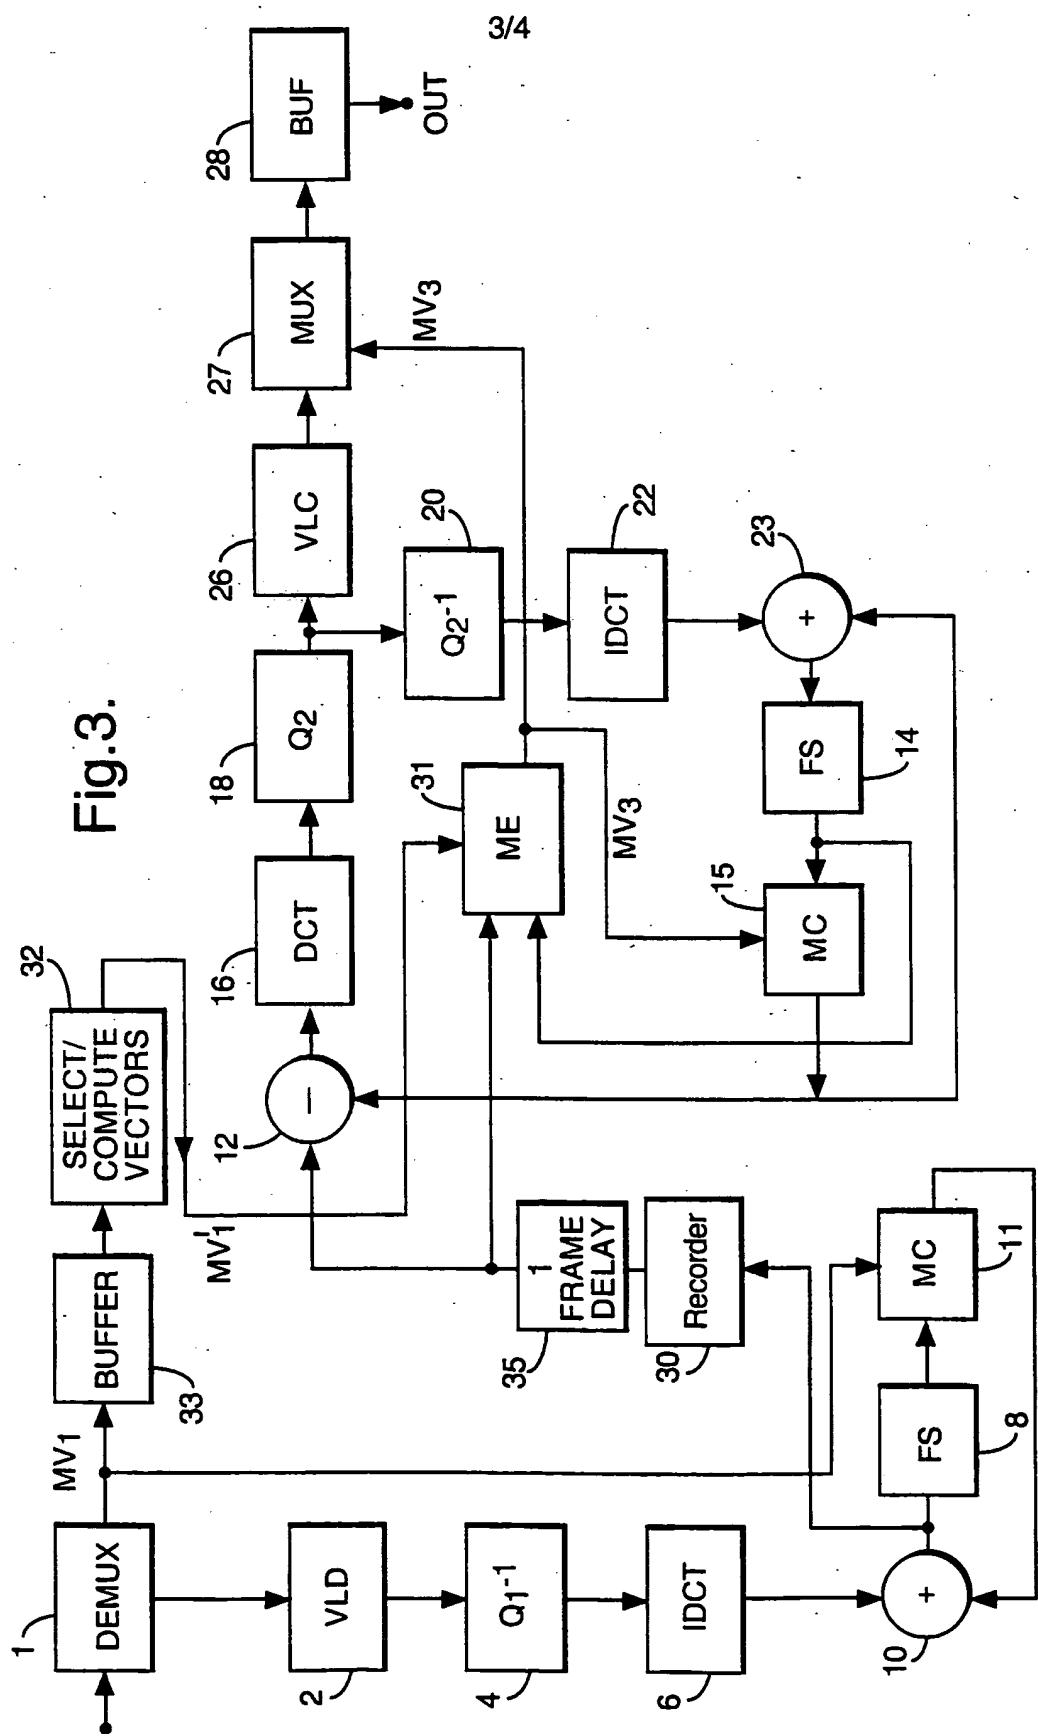
Fig.4.
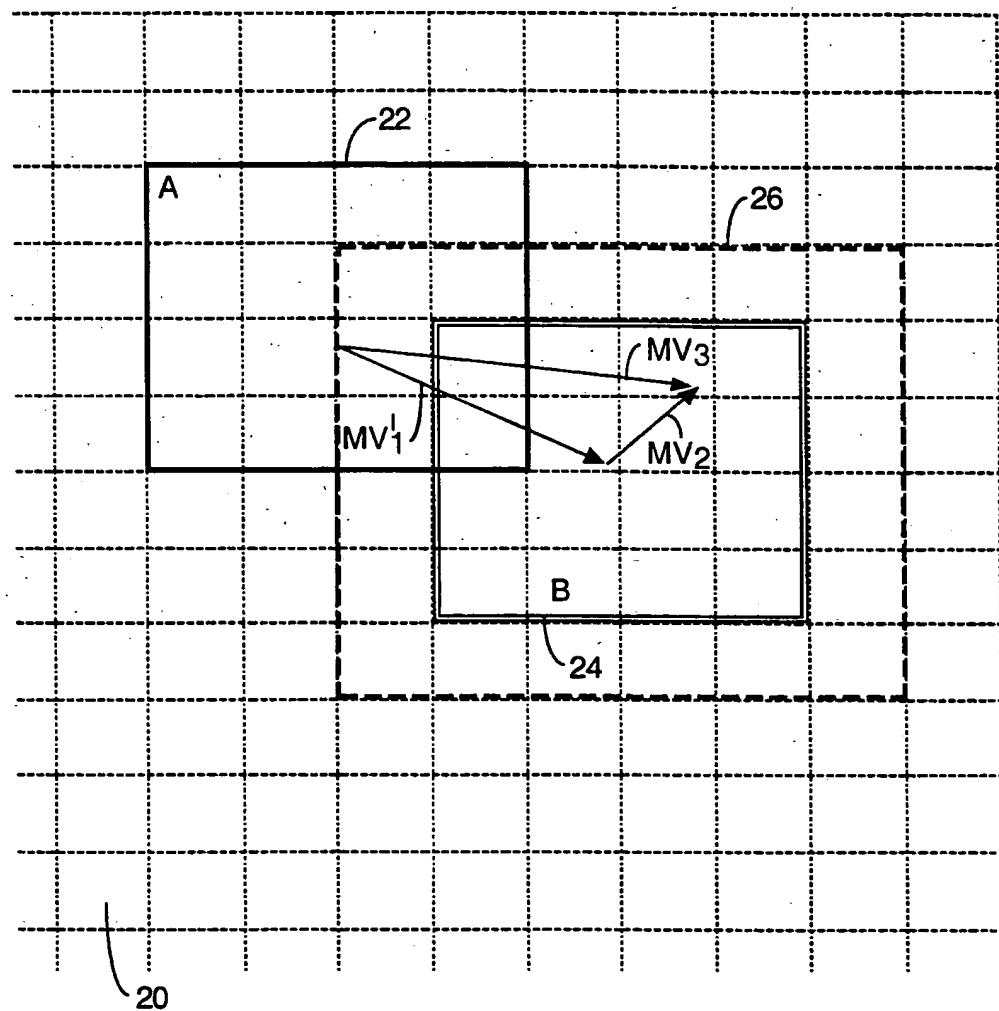
INTERNATIONAL SEARCH REPORT

Interna al Application No	PCT/GB 98/03553

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04N7/26 H04N7/36

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 696 873 A (AT & T CORP) 14 February 1996	1,4,7, 12,15,18
Y	see column 2, line 13 - line 57	2,3,5,6, 8-11,13, 14,16, 17,19-22
	see column 9, line 2 - column 11, line 44 see abstract; figures 1,3,6	
Y	US 5 600 646 A (POLOMSKI MARK D) 4 February 1997 cited in the application see column 3, line 20 - line 26 see column 18, line 10 - column 20, line 16 see abstract; figure 25	2,3, 8-10,13, 14,19-21
	-/--	

[X] Further documents are listed in the continuation of box C.   [X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
15 March 1999	26/03/1999

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016	La, V

Form PCT/ISA/210 (second sheet) (July 1992)

Interna al Application No

PCT/GB 98/03553

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document. with indication.where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 652 678 A (AT & T CORP) 10 May 1995	5,6,16, 17
A	see column 11, line 32 - line 58	1,12
Y	EP 0 690 392 A (PHILIPS ELECTRONICS NV) 3 January 1996	11,22
A	see page 3, line 8 - line 24 see figure 3	1,2,12, 13
P,X	JEONGNAM YOUN ET AL: "Motion estimation for high performance transcoding" 1998 INTERNATIONAL CONFERENCE ON CONSUMER ELECTRONICS, LOS ANGELES, CA, USA, 2-4 JUNE 1998, vol. 44, no. 3, pages 649-658, XP002096503 ISSN 0098-3063, IEEE Transactions on Consumer Electronics, Aug. 1998, IEEE, USA see page 649, right-hand column, line 26 - page 650, left-hand column, line 34 see sections 2.2, 2.3 see section 3 see page 654, left-hand column, line 37 - line 47 see abstract; figures 1,2	1-4, 7-10, 12-15, 18-21
A	EP 0 637 893 A (NEDERLAND PTT) 8 February 1995 see column 2, line 45 - column 3, line 9 see column 4, line 21 - line 36 see column 6, line 53 - column 7, line 32 see abstract; figure 1	1-22
A	EP 0 661 885 A (CANON KK) 5 July 1995 see column 2, line 35 - line 37 see column 5, line 15 - column 6, line 56 see abstract; figure 5	1-22
P,A	WO 98 19460 A (CHRISTOPOULOS CHARILAOS ;ERICSSON TELEFON AB L M (SE); BJOERK NIKL) 7 May 1998 see page 6, paragraph 6 see page 7, paragraph 6 - page 8, paragraph 3 see page 18, paragraph 2 see page 20, paragraph 1	1-22
P,A	EP 0 823 822 A (MITSUBISHI ELECTRIC CORP) 11 February 1998 see page 16, line 35 - line 39 see page 17, line 37 - page 19, line 40	1-22

INTERNATIONAL SEARCH REPORT

Information on patent family members

Interr. al Application No

PCT/GB 98/03553

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
EP 0696873	A	14-02-1996	US	5512953 A	30-04-1996
			CA	2152330 A	10-02-1996
			JP	8070440 A	12-03-1996
US 5600646	A	04-02-1997	AU	4698796 A	14-08-1996
			DE	19681223 T	08-01-1998
			GB	2312807 A	05-11-1997
			WO	9623388 A	01-08-1996
EP 0652678	A	10-05-1995	US	5473379 A	05-12-1995
			CA	2130779 A	05-05-1995
			JP	7193823 A	28-07-1995
EP 0690392	A	03-01-1996	FR	2722052 A	05-01-1996
			FR	2724280 A	08-03-1996
			JP	8051631 A	20-02-1996
			US	5729293 A	17-03-1998
EP 0637893	A	08-02-1995	NL	9301358 A	01-03-1995
			AT	174178 T	15-12-1998
			AU	672507 B	03-10-1996
			AU	6880594 A	16-02-1995
			CA	2128793 A,C	05-02-1995
			CN	1111878 A	15-11-1995
			DE	69414931 D	14-01-1999
			FI	943622 A	05-02-1995
			JP	7095090 A	07-04-1995
			KR	127094 B	29-12-1997
			NO	942866 A	06-02-1995
			US	5544266 A	06-08-1996
EP 0661885	A	05-07-1995	JP	7203429 A	04-08-1995
			JP	7222146 A	18-08-1995
			US	5818537 A	06-10-1998
WO 9819460	A	07-05-1998	AU	4798097 A	22-05-1998
			SE	9603909 A	26-04-1998
EP 0823822	A	11-02-1998	JP	10051766 A	20-02-1998
			AU	692408 B	04-06-1998
			AU	1471897 A	12-02-1998
			CA	2197820 A	06-02-1998
			CN	1172998 A	11-02-1998